



# Xiaomi Redmi 2 Motherboard Replacement

Replace the motherboard in a Xiaomi Redmi 2.

Written By: Alicia Brenner



## INTRODUCTION

Use this guide to remove the motherboard in your Xiaomi Redmi 2 for repair or replacement.

---



### TOOLS:

- [Spudger](#) (1)
  - [Tweezers](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
-

## Step 1 — Motherboard



- Use the flat end of the spudger to remove the back panel from the mid-frame and front body.


## Step 2



- Insert your finger into the curved opening of the mid-frame.
- Lift the battery and remove.



### Step 3

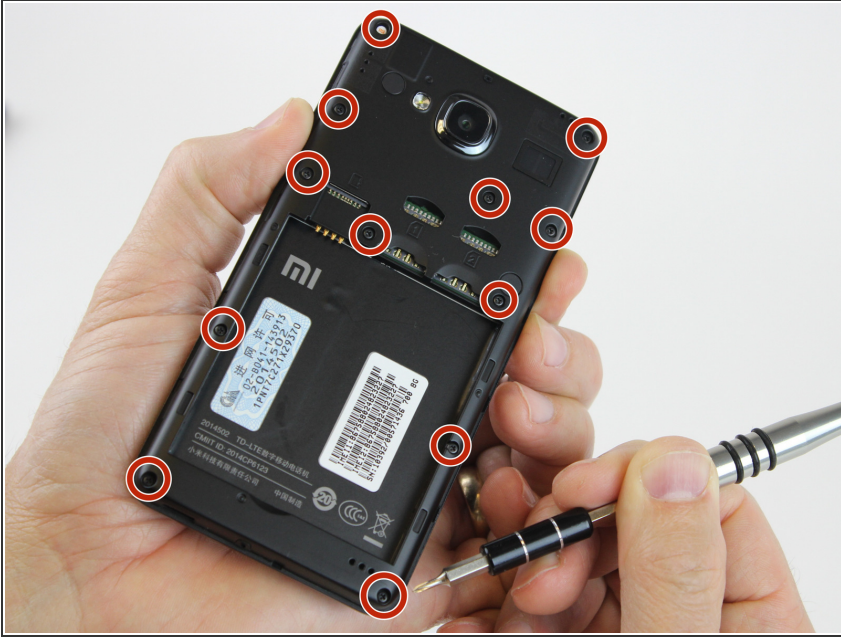

- ❗ Remove the SIM and/or memory cards if present.
- Remove twelve 3.4 mm Phillips #000 screws securing the mid-frame to the front body.

### Step 4



- Slide the spudger between the mid-frame and front body, gradually prying the two bodies apart as you slide the spudger around the perimeter of the phone.

## Step 5



- Remove the 3.4 mm Phillips #000 screw that holds the motherboard to the front body.
- ⚠ Keep this screw separate from the initial twelve.


## Step 6



- Using one prong of the tweezers, pry back the brown clip located on top of the LCD ribbon connector.




## Step 7

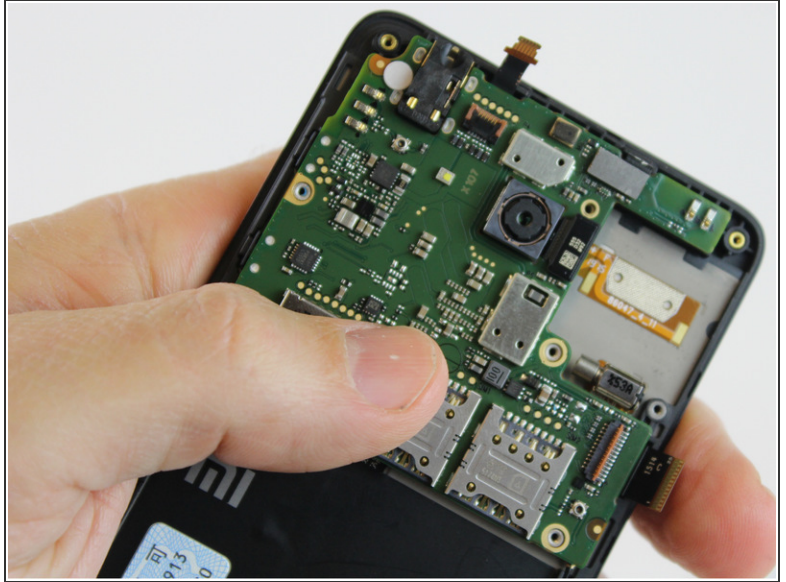

- Using one prong of the tweezers, pry the ribbon clip away from the motherboard.


## Step 8

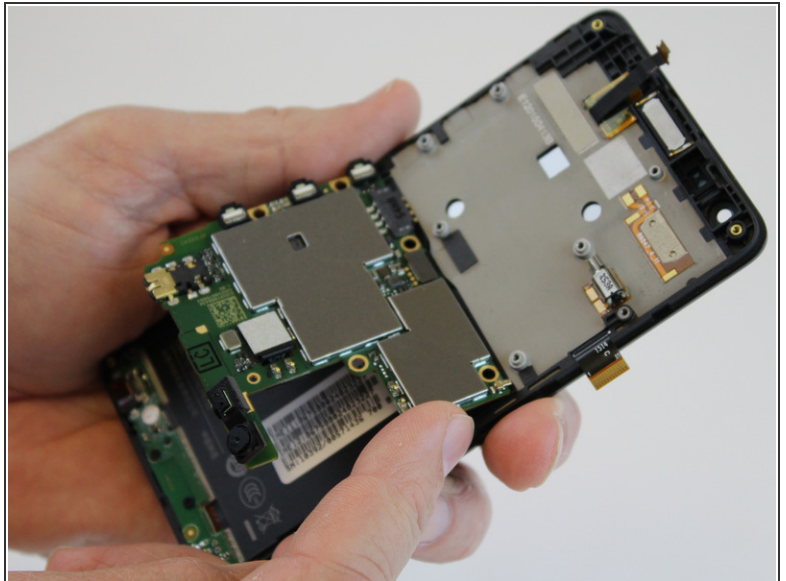

- Lift and hinge the motherboard with your fingers.





## Step 9

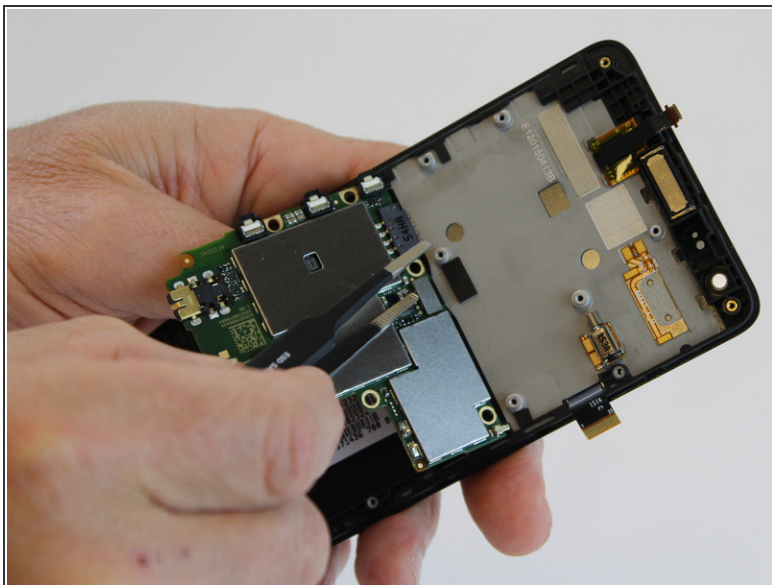

- Using one prong of the tweezers, lift and pry back the metal clip positioned over the front proximity sensor ribbon connector.

## Step 10

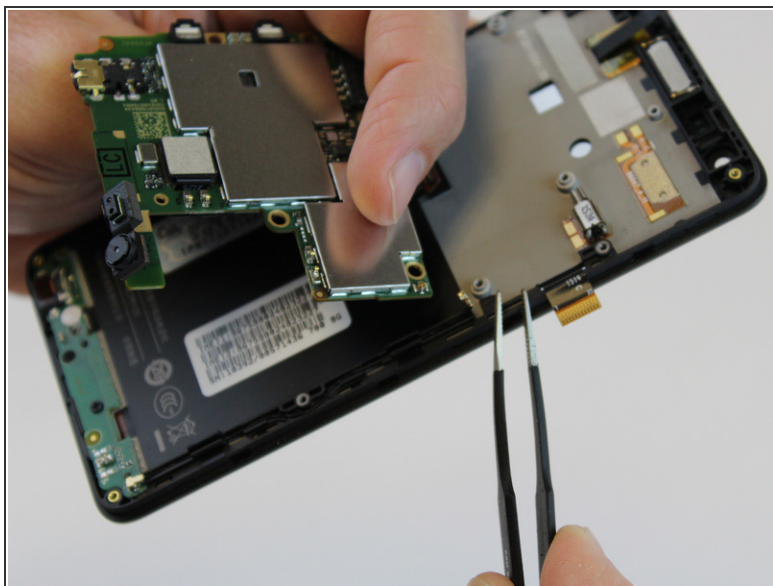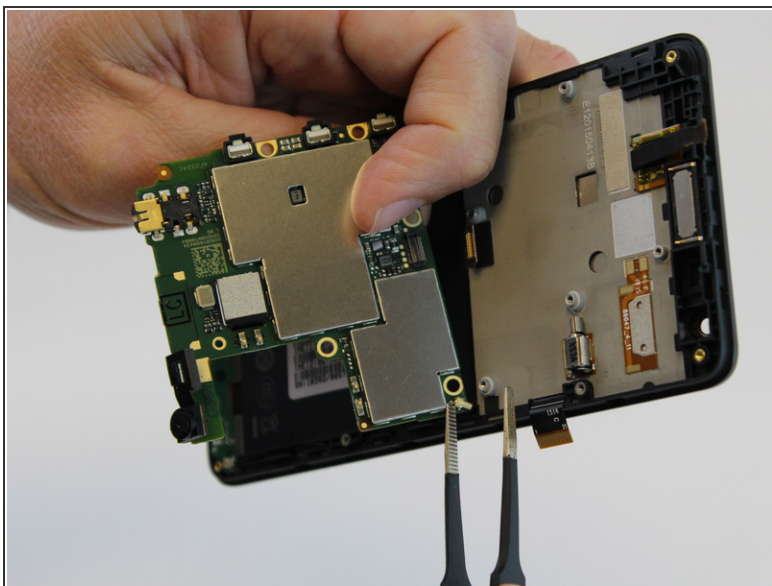

- Using the tweezers, pull the antenna connector from the motherboard.

## Step 11



- Lift the motherboard out of the front cover and set aside.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 01:39:11 AM.